

Guide Navigation

1. Supported Features for the Google Home.
2. How to link Linxura with the Google Home app.
3. How to link Linxura service with the Google Home app.
4. How to set "Automations" in the Google Home app.

Google Home Setup Guide Video Link:

<https://youtu.be/cgurpfiSUXE>

1. Supported Features for the Google Home


Google Home Supported Actions

Actions	Descriptions
Click/Double Click	Functions as a starter in "Automations" in the Google Home.
Rotate	Currently not supported in the Google Home.

2. How to link Linxura with the Google Home app.


Step 1:

Select the Linxura button you want to bind with Google Home.

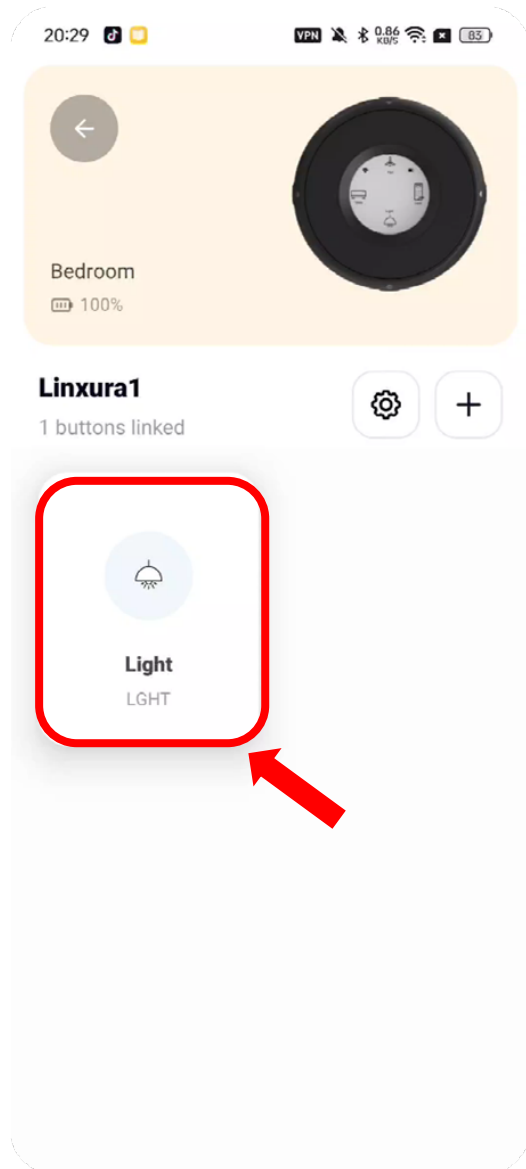


Step 2:


Click 'Select platform'.

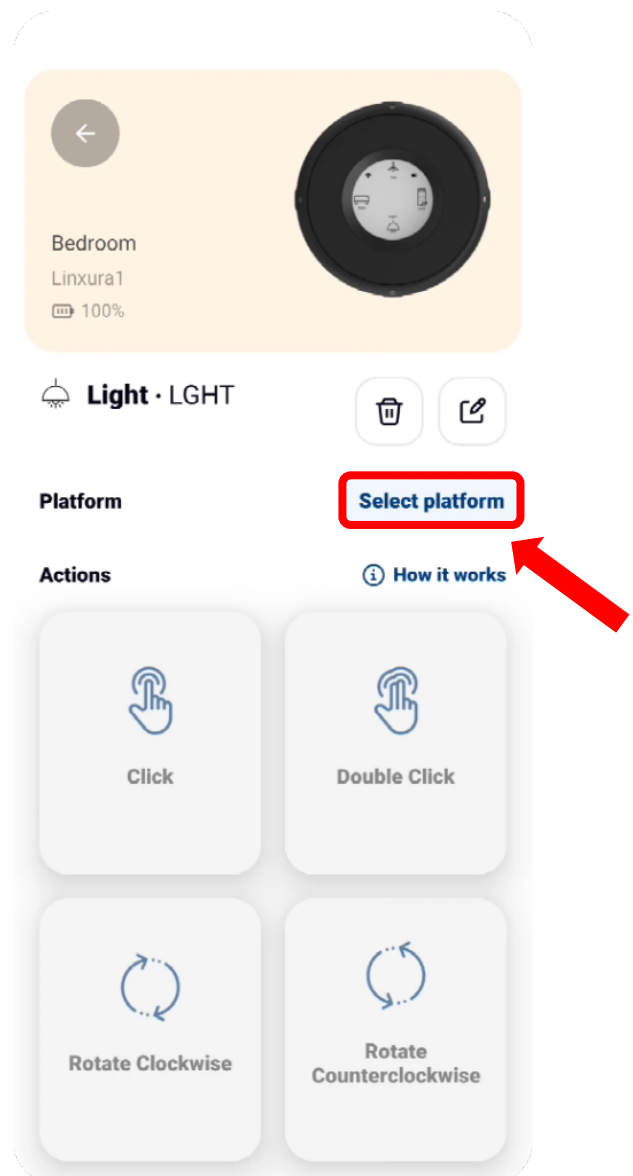

Step 3:
Select 'Google Home'.

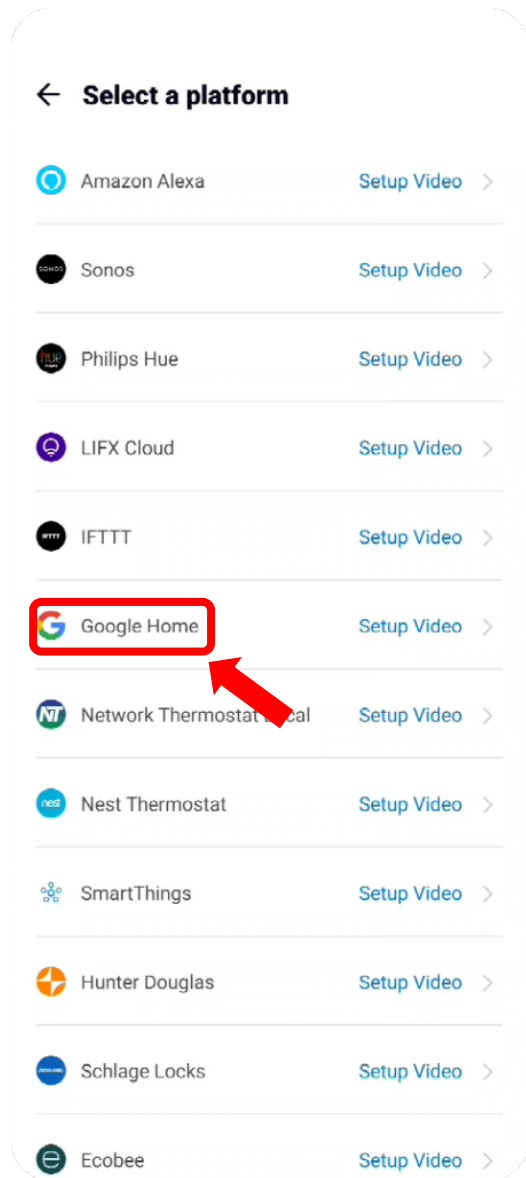


Step 4:
Click 'Confirm'.

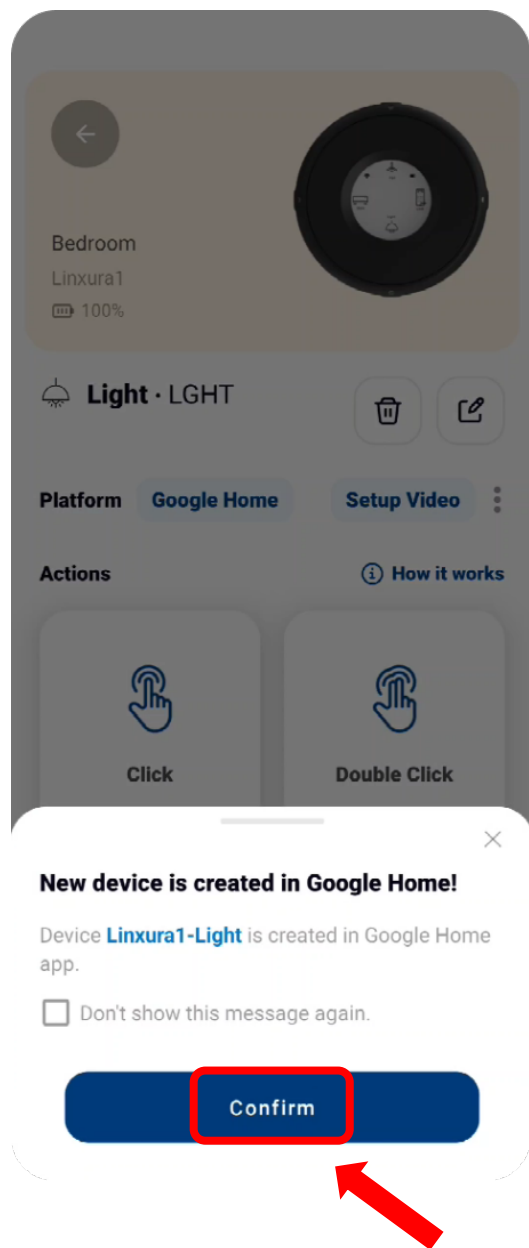

Step 5:

Linxura button link with Google Home successfully!

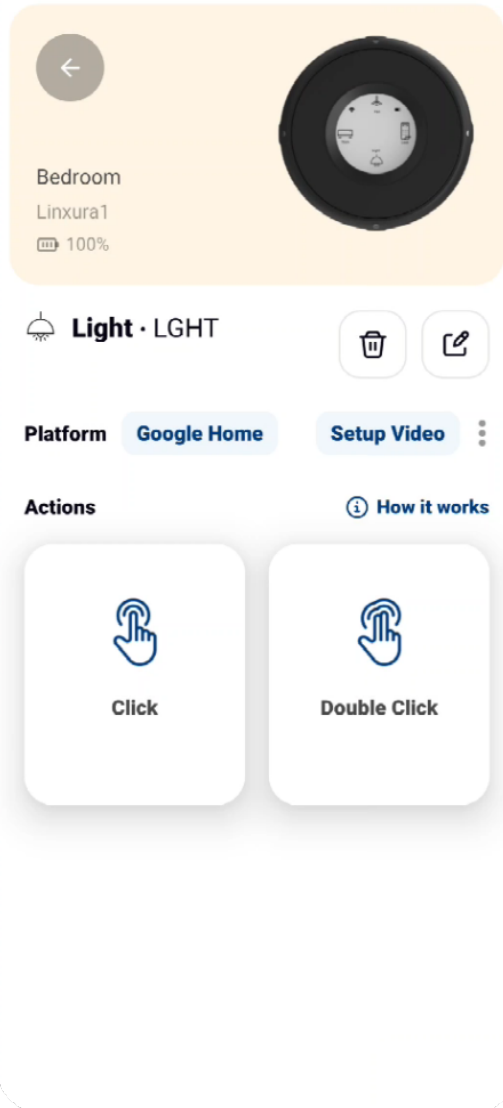



3. How to link Linxura service with the Google Home app.

Step 1:

Make sure your Google Home device is set up in the Google Home app and functioning properly.


Step 2:

Open your Google Home app and click "Settings" in the bottom-right corner.

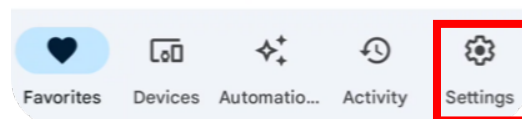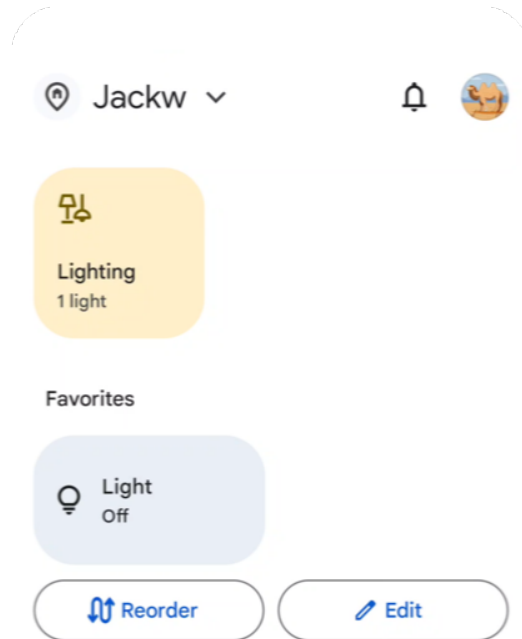


Step 3:

Select the 'Work with Google' service.

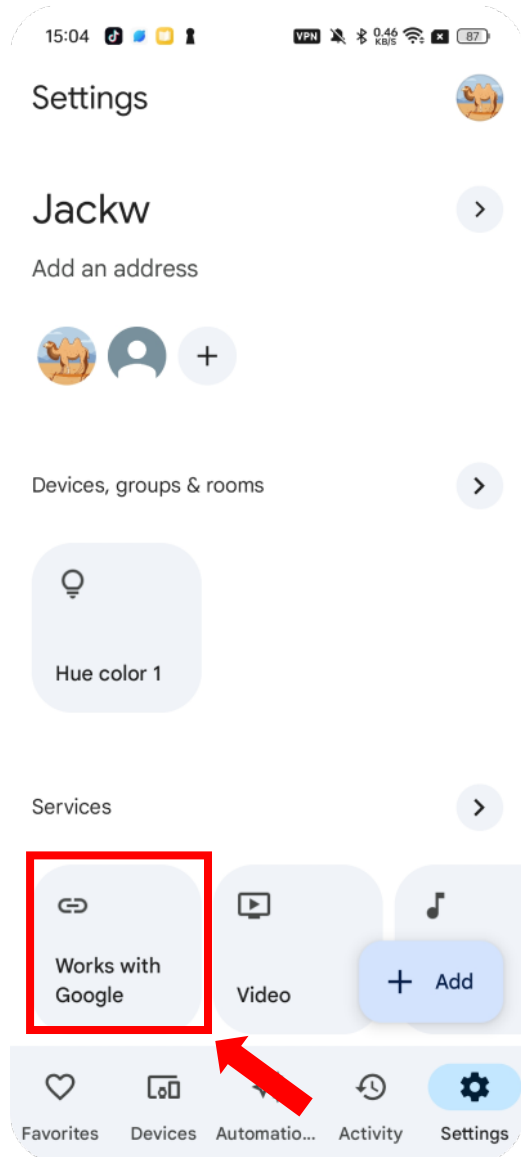


Step 4:


Search to find 'Linxura' service and click 'Linxura'.

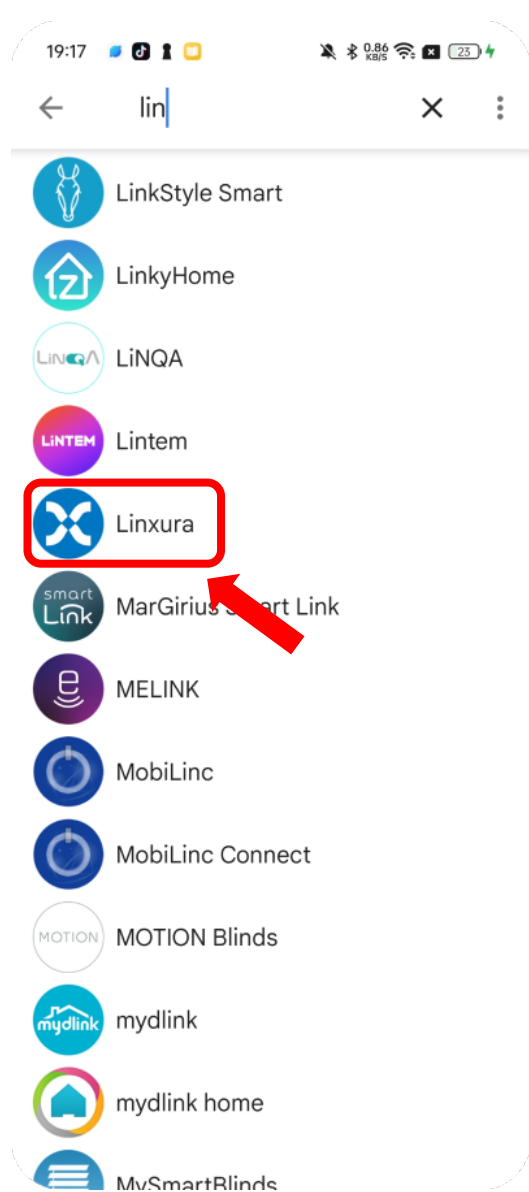


Step 5:
Click 'Continue'.

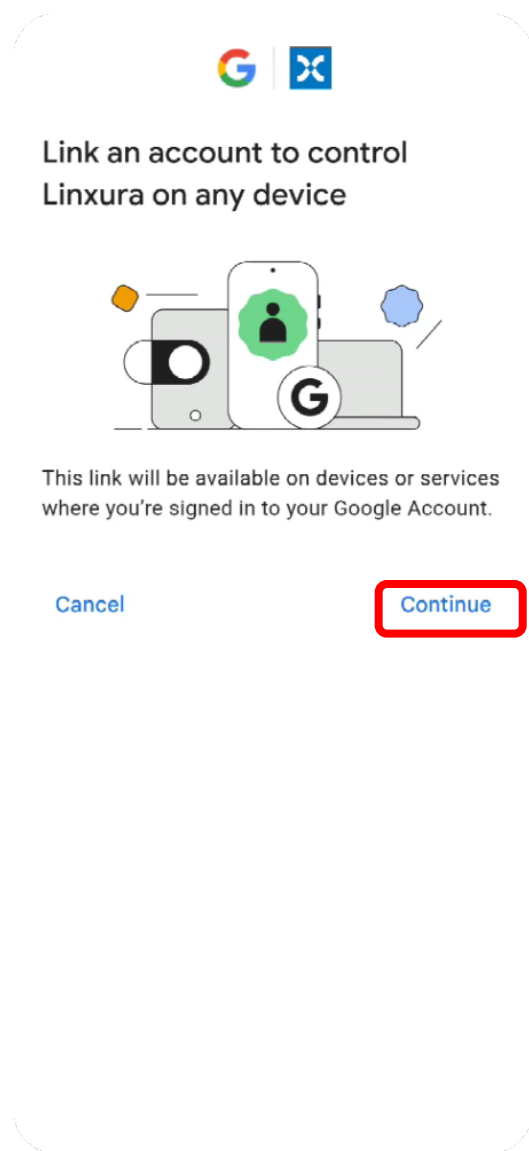

Step 6:
Log in to your Linxura account.

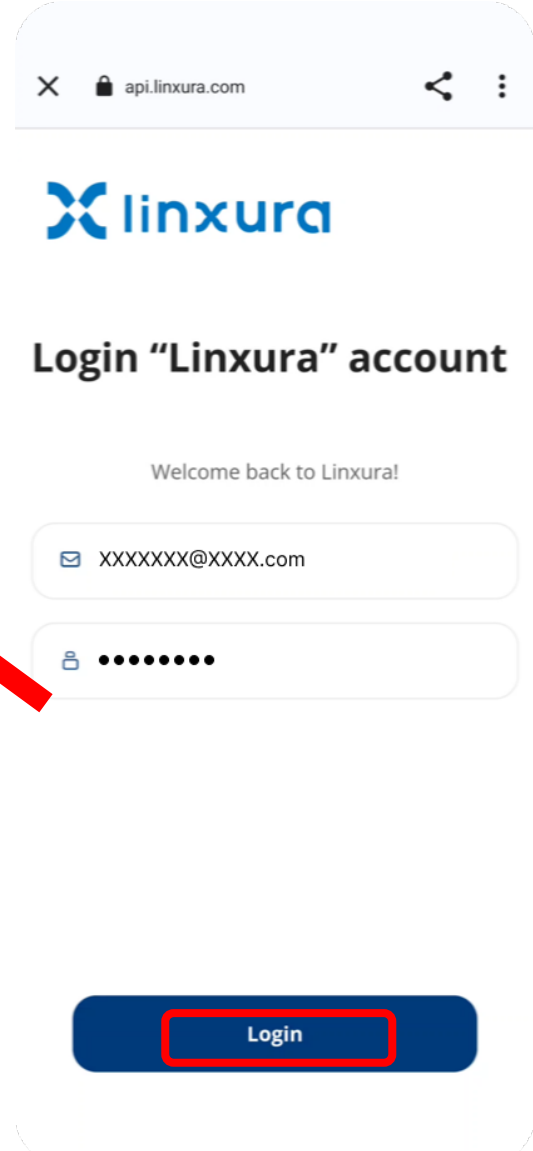

Step 7:
Click 'Authorize'.

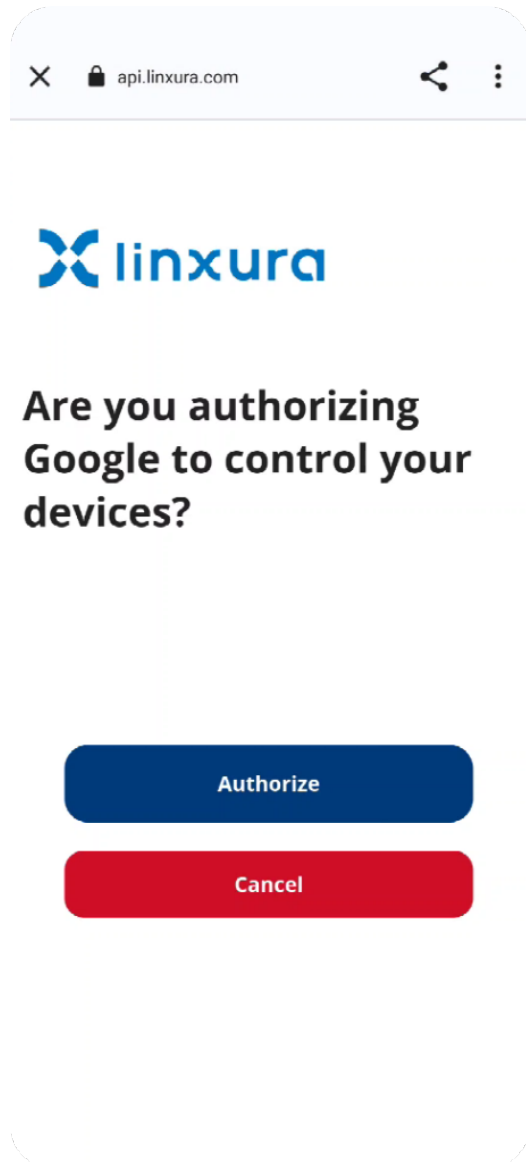

Step 7:
Linxura service has been successfully linked!


4. How to set "Automations" in the Google Home app.

Step 1:

Make sure your Linxura device and action device are added to Google Home's room.

Step 1.1:

Navigate to the device page and long-press the Linxura device you just added.

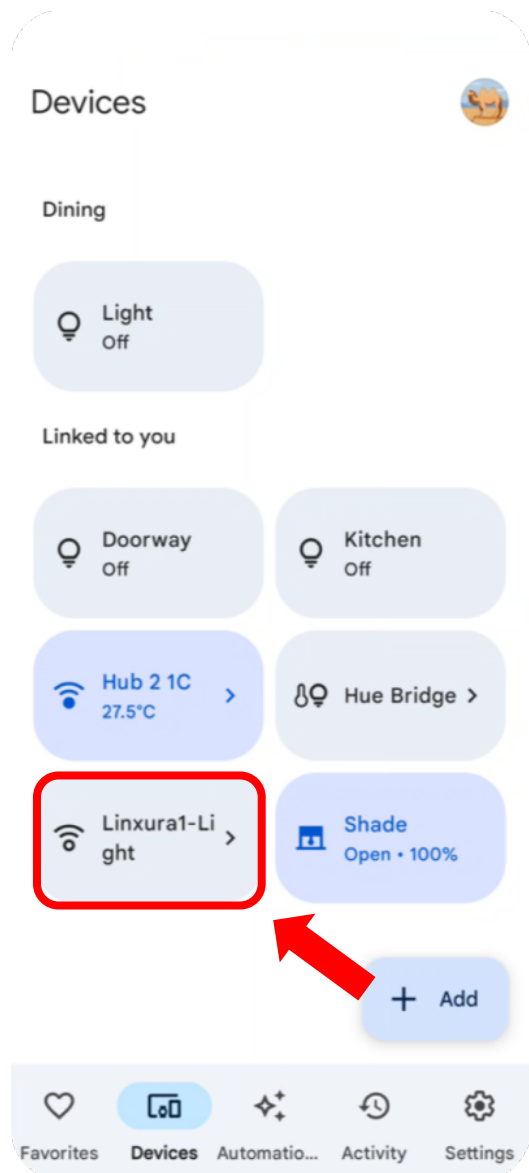


Step 1.2:

Click the "Settings" icon in the top-right corner.




Step 1.3:


Click "Add to a Home" option.

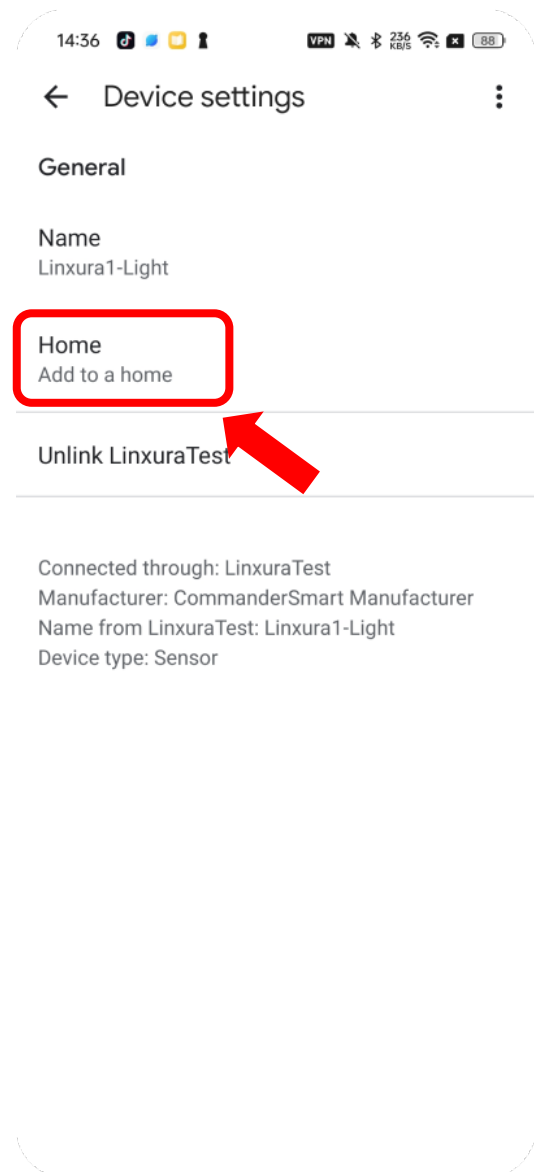

Step 1.4:
Select a home.

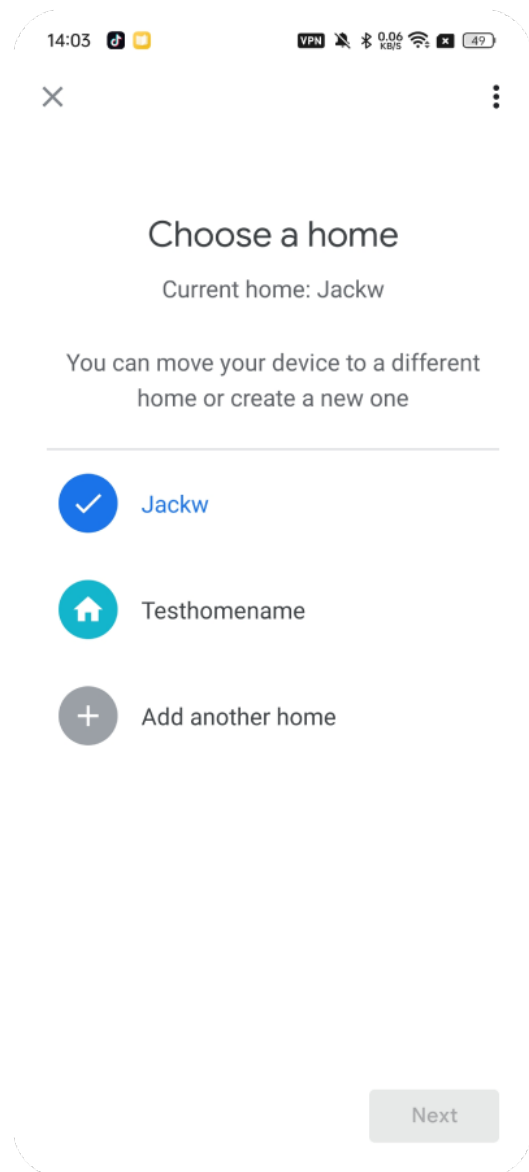


Step 1.5:
Click "Move device".

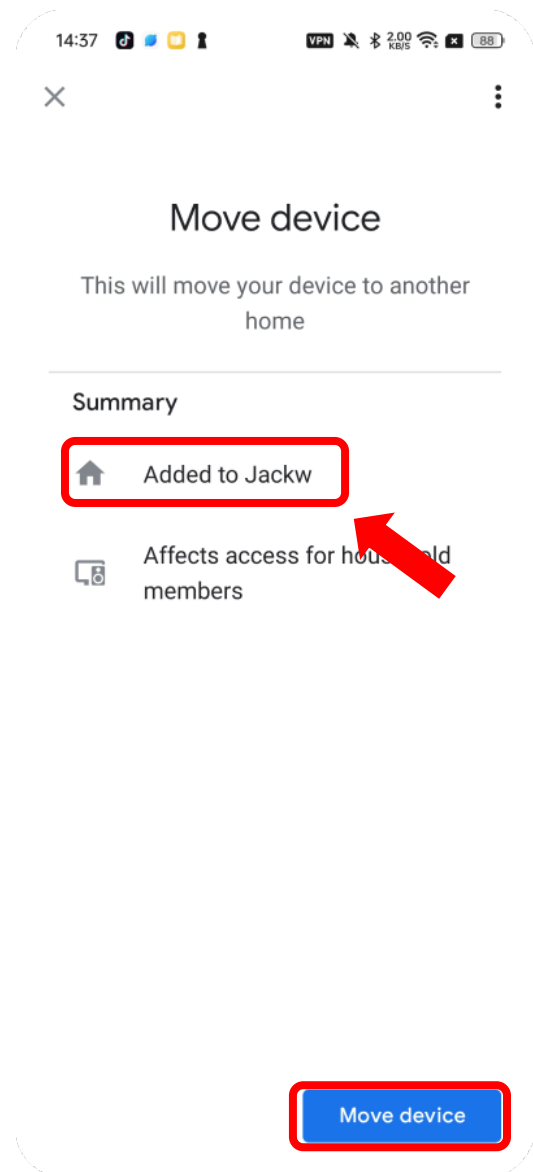


Step 1.6:

Select a room and click 'Next' to finish the room setting.

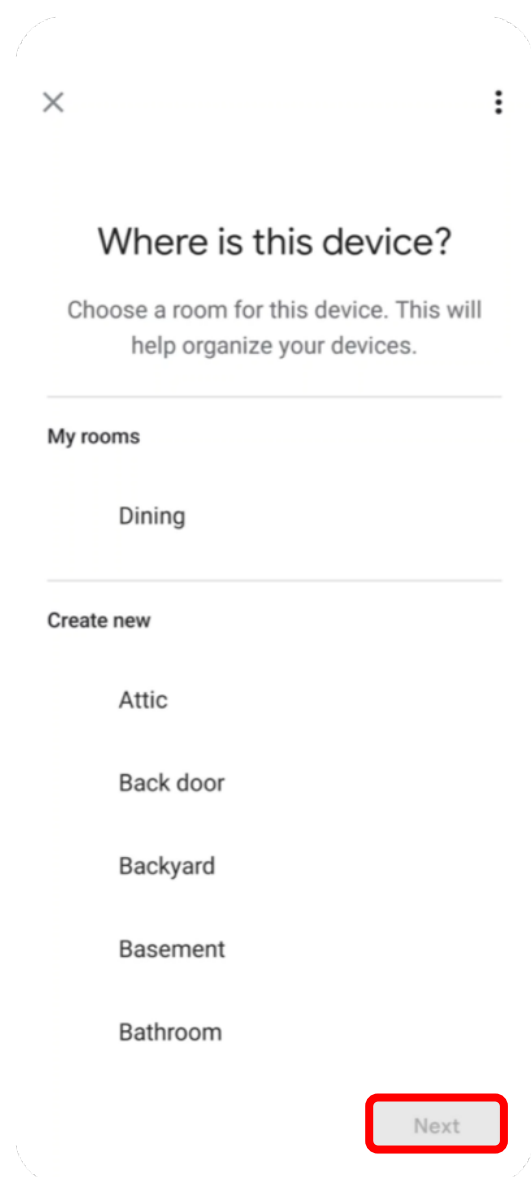


Step 2:


Click 'Automation' in the bottom menu.

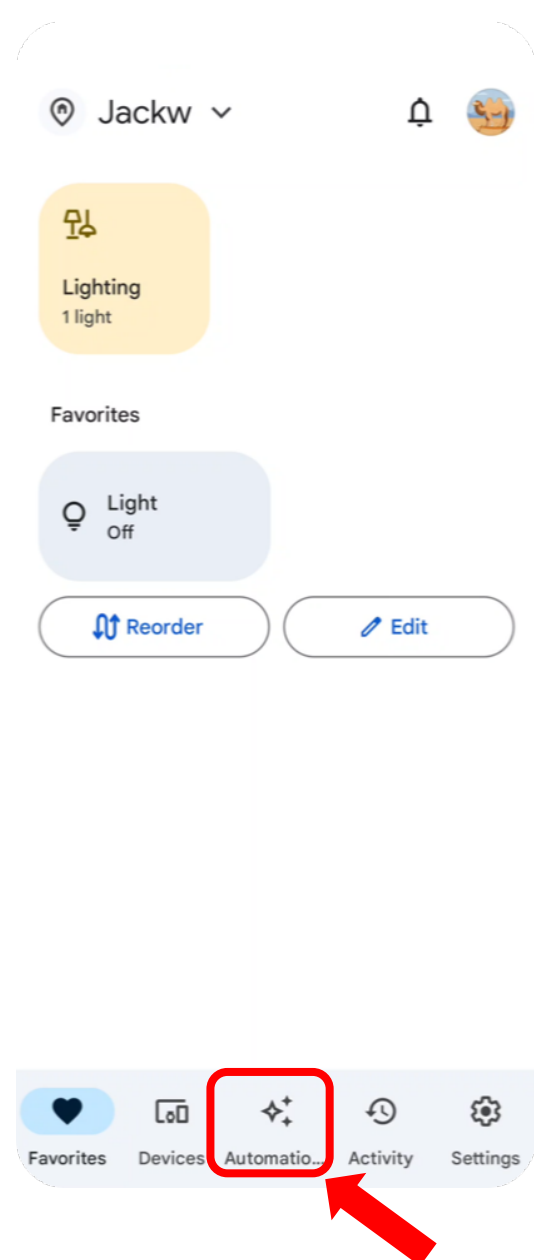

Step 3:
Click the 'Add' option on the right.

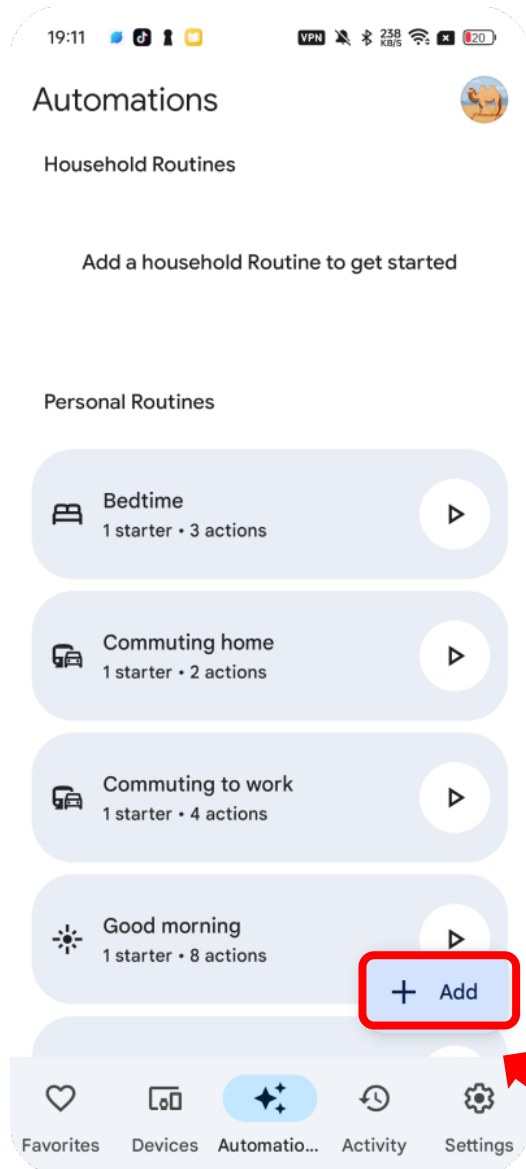

Step 4:
Select the 'Household' option.

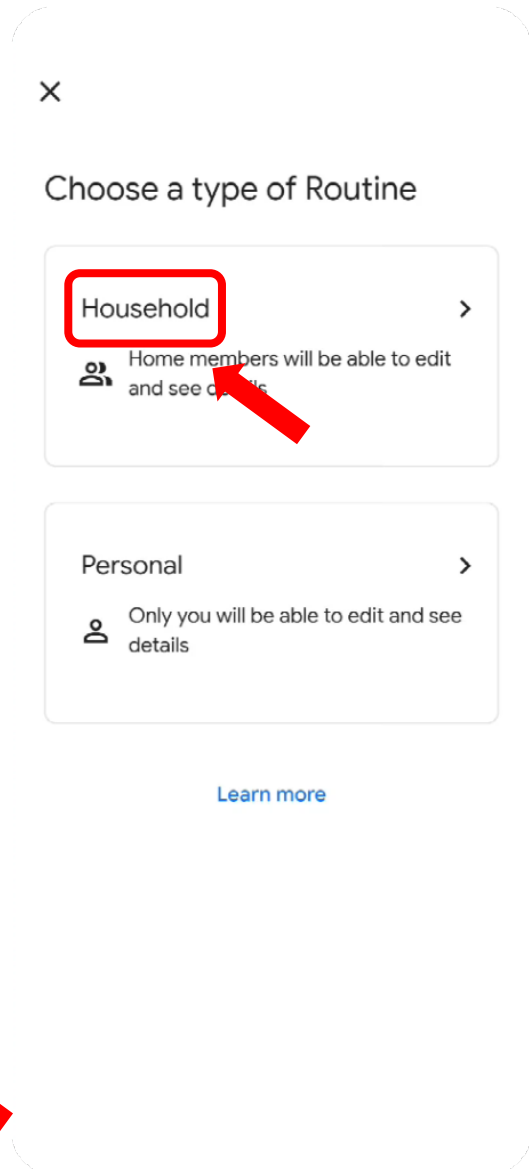

Step 5:
Edit the 'Routines' name at the top.


This screenshot shows the routine editor interface. At the top, there is a header bar with a close button (X) on the left and a menu icon (three dots) on the right. Below the header, the routine name "Untitled" is displayed with a blue icon and a pencil icon to its right. This name field is highlighted with a red rectangle, and a red arrow points to it from the right. Below the name field, there are two sections: "Starters" and "Actions". Each section has a heading and a sub-heading "Choose how this Routine will start" or "Choose actions for this Routine". Under "Starters", there is a button labeled "+ Add starter". Under "Actions", there is a button labeled "+ Add action". At the bottom right of the interface is a blue "Save" button.

Step 6:
Select 'Add starter' Option.

This screenshot shows the routine editor interface with the routine name changed to "Light on". The name field is now highlighted with a red rectangle, and a red arrow points to it from the right. The rest of the interface, including the "Starters" and "Actions" sections with their respective "Add starter" and "Add action" buttons, and the "Save" button at the bottom, remains the same as in Step 5.


Step 7:

Select the 'When a device does something' option.

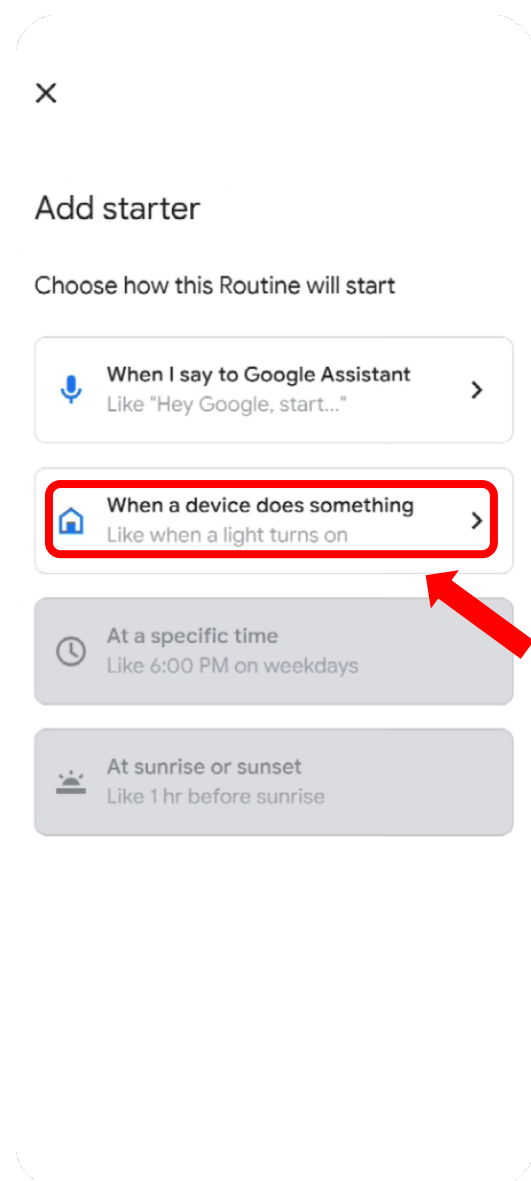

Step 8:

Select one Linxura button.

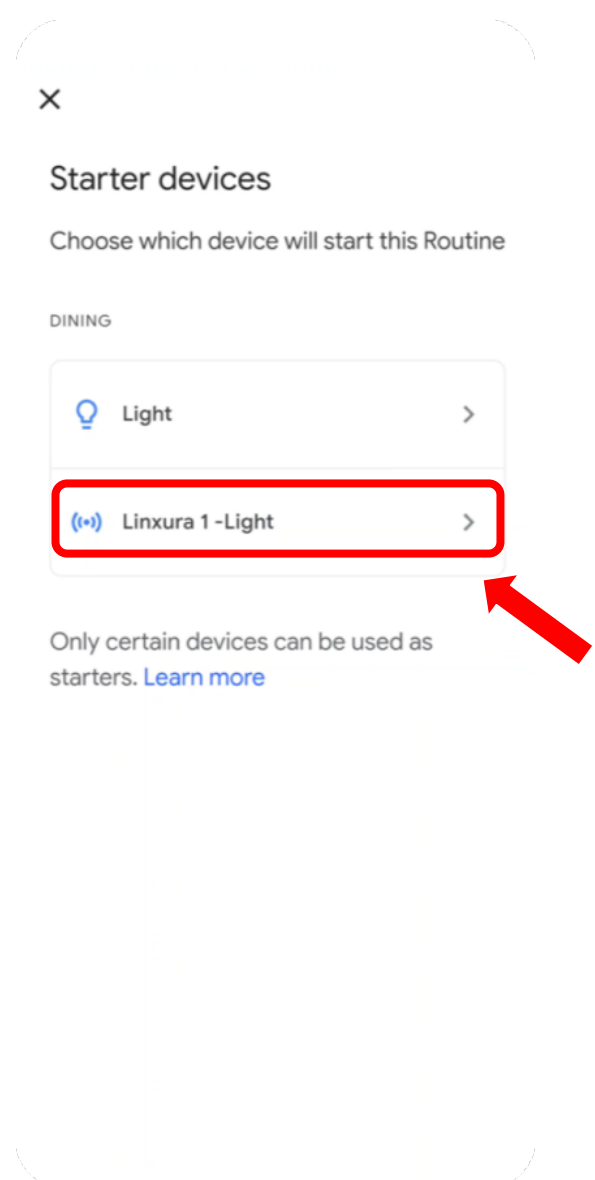

Step 9:
Select a button action and click 'Add starter'.

Starter details

Linxura 1 -Light

Input changes to:

Click ☒

Double click ☐

Reserved - Do Not Use ☐

Device info

Conditions

Time and days
Any time, any day

Add starter

Step 10:
Select the 'Add action' option.

Light on

Starter

Linxura 1 -Light
Input changes to Click

+ Add starter


Actions

Choose actions for this Routine


+ Add action

Save

Step 11:
Select one of the options.

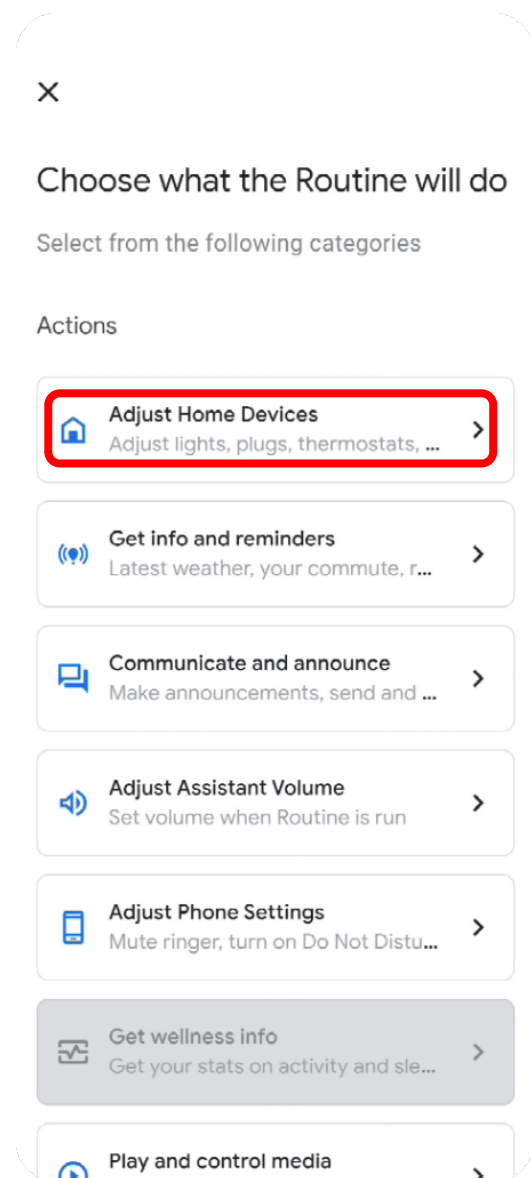

Step 12:
Select a device.

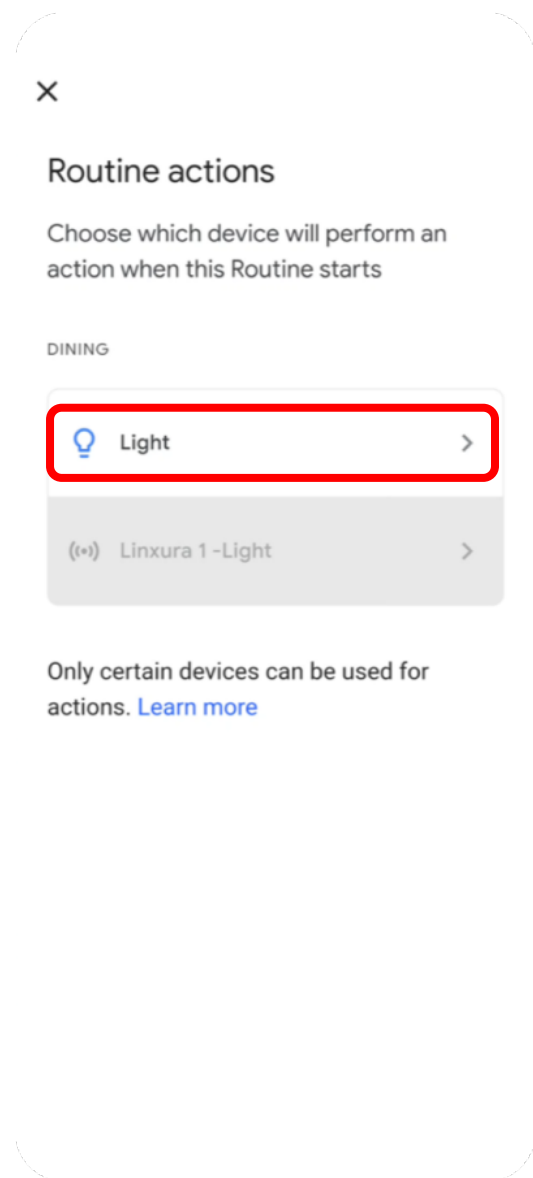


Step 13:
Select an action and click 'Add action'.

×


Action details


Light


 Turn on or off ✓


Turn on

Turn off

 Change brightness □

 Change color □

 Start light effect □



 Stop light effect □

Device info ▼


Add action

Step 14:
Click 'Save'.

× ⋮

 Light on 


Starters

 Linxura 1 -Light
Input changes to Click >

+ Add starter

Actions

=

 Light
Turn on

+ Add action

Save

Step 15:

You can now use Linxura to control your Google Home device!

