

## Guide Navigation

1. Supported features in Zigbee mode.
2. Connecting Linxura with SmartThings
3. Configure Zigbee Settings in the Linxura App

1. Supported feature in Zigbee mode

	Click	Double Click	Long Press
Top button	Trigger Button1 click action	Trigger Button1 double click action	Trigger Button1 long Press action
Right button	Trigger Button2 click action	Trigger Button2 double click action	Trigger Button2 long Press action
Bottom button	Trigger Button3 click action	Trigger Button3 double click action	Trigger Button3 long Press action
Left button	Trigger Button4 click action	Trigger Button4 double click action	Trigger Button4 long Press action

## 2. Connecting Linxura with SmartThings

### 2.1 Prerequisite

Ensure you have a SmartThings hub that supports Zigbee. The hub must be installed and functioning correctly.

### 2.2 Pairing Linxura with SmartThings


On Linxura:

Quickly press the switch on the back of your Linxura to enter the mode selection page. Select Zigbee mode.




On the SmartThings app:


1. Tap the "+" icon in the top-right corner.

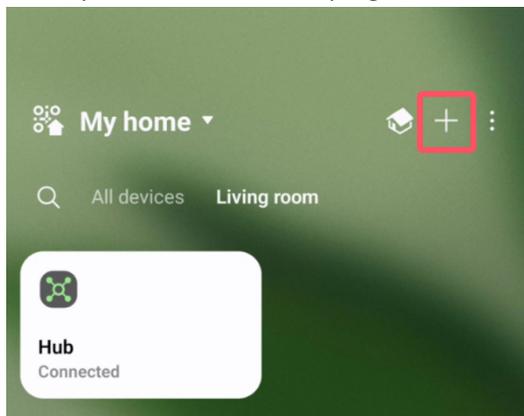

2. Select "Scan nearby" to search for new devices.

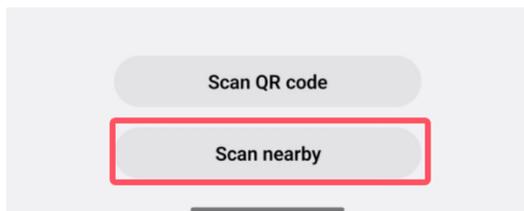

3. Wait for the pairing process to complete.

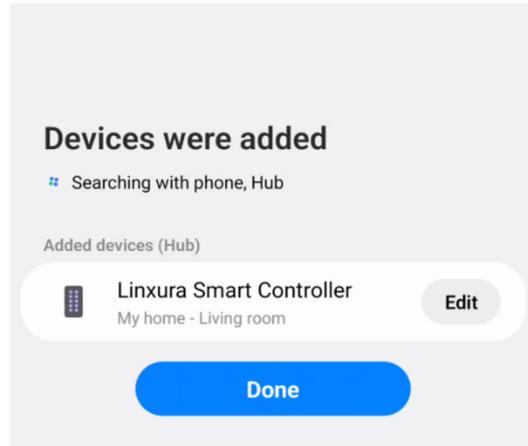

## 3 Configure Zigbee Settings in the Linxura App

**Note:** When using the default configuration of Linxura's Zigbee mode, it is not necessary to add Linxura to the Linxura app. However, if you need to modify the Zigbee configuration through the Linxura app, please ensure that Linxura has been added to the app. Refer to 'Linxura add to Linxura app guide'. The link is below:

<https://www.linxura.com/AppSetupGuide>

- 3.1 Switch Linxura to 'Config' page.

- Quickly press the switch on the back of your Linxura to open the Mode Selection page.



- Select Wi-Fi option.



- Quickly press the switch on the back of Linxura to turn to the selection page




- Select the CONFIG option.




### 3.2 Use the Linxura App to set button names.



- Navigate to the Device Setting page and select the Zigbee Setting option.

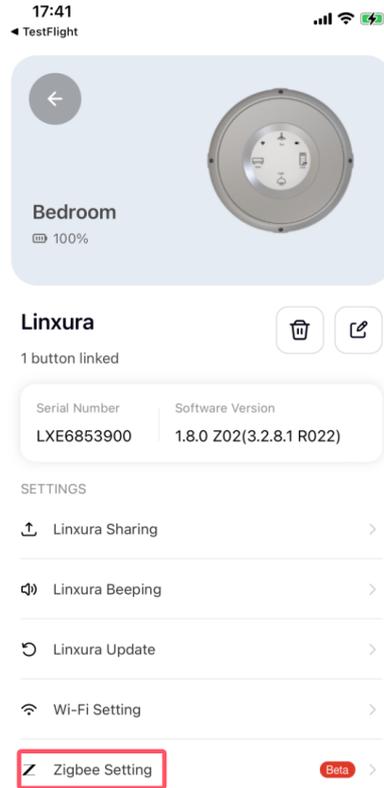

- Connect the Linxura via Bluetooth.

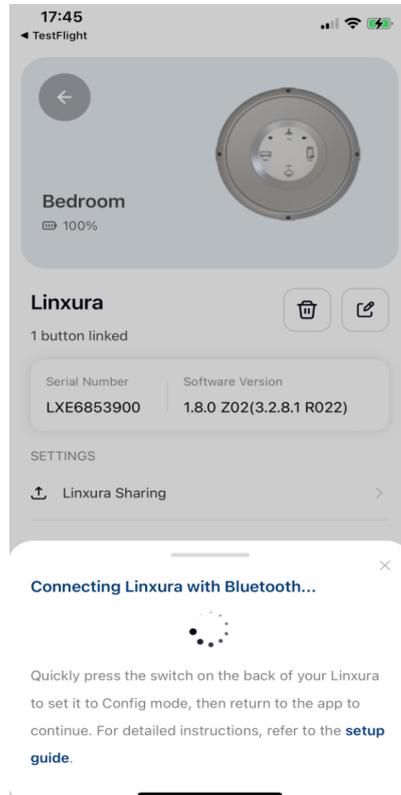

- Click the Edit option to name the buttons as needed.

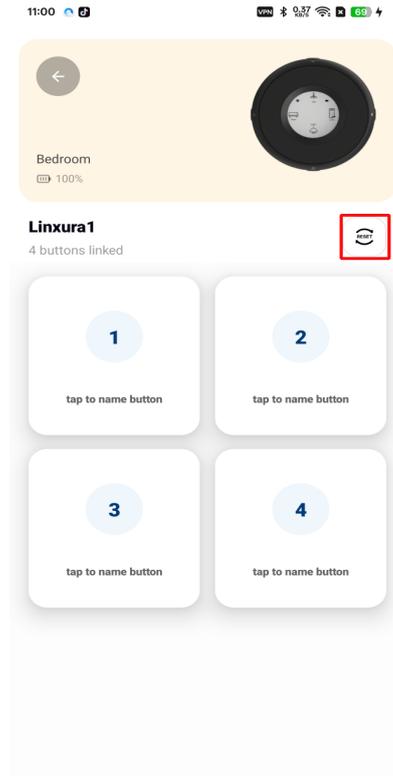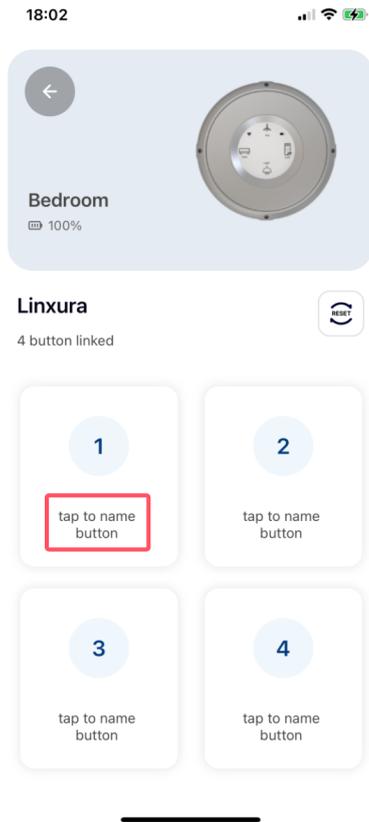

### 3.3 How to Reset Zigbee Function

Note: You can reset the Zigbee function if you're experiencing issues or need to switch to a different Zigbee network (e.g., Home Assistant). This reset only affects the Zigbee settings and does not impact Wi-Fi or other modes. You'll need to add Linxura to the Linxura app to perform the reset.

- Click the 'Reset' option to reset Zigbee function. The current Zigbee configuration will be deleted, and Linxura can be added to another Zigbee network.